



10/509106  
PCT/GB03/001434



INVESTOR IN PEOPLE

The Patent Office  
Concept House 27 SEP 2004  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ  
REC'D 19 MAY 2003  
WIPO PCT

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for substitution as, or inclusion as, the last part of the name of the words "public limited" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed


*[Handwritten signature]*

Dated 30 April 2003

**BEST AVAILABLE COPY**

**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

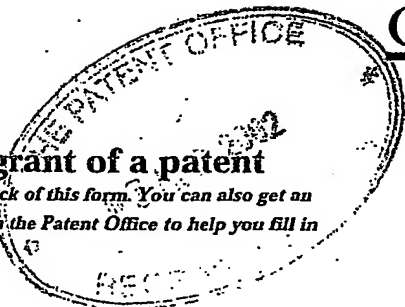

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

03 APR 2002

1. Your reference

RSJ07380GB

04APR02 E708379-5 D02890  
701/7750 0-00-0207749.3

2. Patent application number

(The Patent Office will fill in this part)

0207749.3

3. Full name, address and postcode of the or of each applicant (underline all surnames)

BioWisdom Limited  
Merlin Place  
Milton Road  
Cambridge, CB4 0DP  
GREAT BRITAIN

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

Great Britain

8073942201

4. Title of the invention

DATABASE SEARCHING METHOD AND SYSTEM

5. Name of your agent (if you have one)

Gill Jennings & Every

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Broadgate House  
7 Eldon Street  
London  
EC2M 7LH

Patents ADP number (if you know it)

745002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

14

Claim(s)

3

Abstract

Drawing(s)

252

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. For the applicant  
Gill Jennings & Every

I/We request the grant of a patent on the basis of this application.

Signature



Date

03/04/2002

12. Name and daytime telephone number of person to contact in the United Kingdom

R. E. Skone James

020 7377 1377

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DATABASE SEARCHING METHOD AND SYSTEM

The present invention relates to a method and system for searching a plurality of information databases.

5 Databases are well-known and widely used for the organized storage of information. Depending upon the application in question, in many cases there is a great demand for the provision of searching methods to enable the stored information to be selectively accessed by a user.  
10 For this reason, a great deal of investment is often made in the production, updating and on-going development of such databases. The provision of improved searching methods forms part of this development.

In fields of particular scientific or commercial  
15 interest there often exist a number of databases providing related and/or overlapping information. These databases might receive directly from different competing database suppliers. For example, due to the independent generation and cataloguing of scientific information.

20 One particular example of the use of numerous databases is in the field of biomedical science. The biomedical domain is a multi-disciplinary domain encompassing all areas of biology and medicine. There is a large and ever increasing volume of electronic biomedical  
25 information present upon a number of databases, which are individually dedicated to particular fields within the biomedical discipline.

Access to such information in cases such as these is unfortunately frustrated by the large number of disparate  
30 data sources and the lack of a standard nomenclature being used between them.

Although a multitude of nomenclature or classification systems exist, there is a lack of consistency relating to their architecture and content. This hinders the ease with  
35 which the databases can be accessed. The content can also be variable between such databases as expertly annotated versions tend to have narrow discipline-related

perspectives, do not cover historical terms and indeed are not contemporaneous.

As a result, database users tend to focus their investigations upon single databases with which they are familiar. This has associated disadvantages in that information which is highly relevant to the user may be present upon one or more databases covering overlapping or related fields but this information will not become known to the user.

One of the main problems in such interrelated disciplines is that particular terms used in one discipline may not be identical to those used in a different discipline and therefore automatic computer-based searching is severely limited. Furthermore, the arrangement of the information within such databases is generally unique to the database in question. The performance of a search upon multiple databases of this kind therefore often requires labourious searching on specific individual databases with a detailed knowledge of each subject being needed in order to perform a high quality search.

There is therefore a need to provide an improved searching method to enable searching across multiple databases.

In accordance with a first aspect of the present invention we provide a method of searching a plurality of information databases for records related to an input search term, comprising:-

selecting a group of related search terms containing the input search term, from a search database of terms arranged in predefined groups according to their relationship with one another, wherein each term is present within one or more of the information databases; and,

searching for terms from the selected group within a data repository comprising selected data previously extracted from the records of each information database, to identify the corresponding records within the information

databases which contain the terms within the selected group.

The present invention overcomes many of the problems associated with searching a plurality of information  
5 databases, in that groups of related search terms are used to search upon the various databases provided. These groups are predefined and, when an inputted search term is provided by a user, the search database is queried in order to select the one or more groups containing this inputted  
10 search term. In particular, this allows dissimilar terms having identical or similar meanings, to be searched upon the plurality of information databases. This greatly improves the power of the searching technique and directly allows extension of searching beyond a single database to  
15 multiple databases. The speed of multiple database searching is therefore improved as a result.

The method particularly benefits normal users who are familiar with only a single discipline, in that the  
provision of searching across multiple disciplines is  
20 provided without a detailed knowledge of these other disciplines being required.

The present invention is not limited to any particular types of information databases nor to the subject matter of their contents. However, the invention is particularly  
25 advantageous for use in cases where a number of large and complex information databases are provided, each providing related or overlapping information. This is notably the case in the biomedical field.

The present invention also recognises the problem  
30 that, for many databases, searching for information within more than one database may increase the amount of processor time required for searching. This is addressed by previously extracting selected data from the various information databases and storing it in a dedicated data  
35 repository. Only selected data is normally needed for search purposes, because with most types of search it is not necessary to search through all data contained within

each record of the information databases. One example of this is in the searching of a biotechnology database in which lengthy gene sequences are provided but the searching of these actual sequences is not required. The presence of such sequences represents a large amount of redundant data insofar as a search is concerned which is related to the causes of disease.

It is therefore advantageous to extract data from the records of such information databases and to store the data separately in a data repository such that the speed and efficiency with which the data may be searched can be improved.

The data repository is preferably arranged as a number of records, with a repository record corresponding to a record present within one of the information databases. There is therefore preferably a direct correspondence between the number of individual records in the information databases and the number of individual records in the repository. Each record in the repository preferably further comprises a pointer identifying the specific record in the information database to which it relates. This is used to allow access by a user to the full record when required.

In the case of a direct correspondence of records between the repository and databases, this access may be achieved by simply using identical record identifiers (such as accession numbers). However in cases of non-direct correspondence, a specific and separate pointer to the particular record is used.

Due to the extraction of the data from the information databases, typically the amount of selected data in the repository is less than that contained in the information databases. The degree to which the former amount is smaller is dependent upon the particular type of record used and the fields which are desired to be searched within each record.

In general, the data in the repository comprises definitional and/or semantic data. The definitional data preferably describes data in terms of its nature, use or value whereas the semantic data preferably describes alternative terms for the data in the information databases. Generally, the semantic data describes synonymous terms in the information databases.

Within the search database, each term preferably has corresponding metadata indicating the one or more information databases within which the particular term is contained. This information can be used to reduce needless searching upon databases where it is known that no such term is present. This therefore increases the search speed during use. Such metadata also preferably indicates the one or more fields of the information database(s) within which it is contained as it will be recognised that each information database generally has a unique format.

Preferably the terms in the predefined groups are arranged within the search database such that the predefined groups are formed from synonymous terms. Each group is also typically provided with a unique group identifier.

Due to the possibility that an inputted search term may be found within more than one group, the method preferably further comprises determining the context of the records retrieved using the inputted search term (and associated group of terms). Following identifying the groups in which the term is present, when the repository is searched the context of each record may be determined during the search itself (to limit the number of records returned) or later following the selection of all records containing any terms in the group.

The context may be determined based upon the field type of the repository record in which the term is found such as a "domain". Alternatively, or additionally, the context may be determined by searching for the presence of one or more of the other terms within the group, in the



same field or record of the repository. This allows automatic selection of the correct search subject.

In general, the method according to the first aspect of the invention is performed by a computer program comprising suitable computer program code means. Such a computer program may be retained upon a computer readable medium.

In accordance with the second aspect of the present invention, we provide a database searching system for searching a plurality of information databases for records related to an inputted search term, the system comprising:-

a search database comprising related search terms arranged into predefined groups according to their relationship to one another, wherein each term is present within one or more of the information databases;

selection means, for selecting a group containing the inputted search term from the search database;

a data repository comprising selected data previously extracted from the records of each information database; and,

searching means for searching the repository for terms from the selected group to identify the corresponding records within the information databases which contain the terms within the selected group.

Preferably the search term is provided to the system using an input means which may take the form of a local input device, or alternatively a communication network such as the Internet. The use of a communication network allows users to access the system from remote locations. The system may also comprise the information databases themselves, although typically these are also located remotely from the data repository. The selection and searching means are typically provided as a combined query system upon a computer. This computer may also contain either or both of the data repository and the search database..

An example of a multiple database search method and system according to the present invention will now be described, with reference to the accompanying drawings, in which:-

5        Figure 1 is a schematic representation of the search system; and

Figure 2 is a flow diagram of a method of searching using the search system.

A multiple database system relating to the field of  
10        biomedical science is generally indicated at 1 in Figure 1. A number of individual proprietary information databases are indicated at 2,3 and 4. Examples of these databases include "Genbank" (National Centre For Biotechnology Information), "Swissprot" (European Bioinformatics  
15        Institute), "OMIM" (National Centre For Biotechnology Information) and "UMLS" (National Library Of Medicine). In this example, three information databases are provided relating to gene sequences and genetic disorders.

A data repository 5 is arranged in communication with  
20        each of the information databases 2,3,4. The data repository 5 is organised as a database, stored on a local computer server. The information databases 2,3,4 are stored upon remote servers and accessed by the data repository 5 using a suitable network such as the Internet.  
25        A query system 6 is arranged to access the data repository 5 and is implemented by suitable software running upon a local computer (which may be the server upon which the data repository 5 is stored).

A separate search database 7 is also provided on the  
30        query system computer and this is arranged to be accessed by the query system 6. An input means 8 is provided to allow a user of the system to access the query system 6. In the present example, the input means 8 is a remote computer connected via a communication network such as the  
35        Internet, to the query system 6. Alternatively, it could be a local input device such as a keyboard attached to the query system computer.

Regarding the information databases 2,3,4 these are generally arranged as a large number of records, with each record corresponding to a particular entity. In the case of the Genbank database, the records are arranged according to individual gene sequences. Each record contains a large number of fields. Examples of these for the Genbank information database include: LOCUS, DEFINITION, ACCESSION, VERSION, KEYWORDS, SEGMENT, SOURCE, ORGANISM, REFERENCE, AUTHORS, TITLE, JOURNAL. A large amount of data is therefore provided in each record and not all of this is useful for searches of the type provided by the system of this example.

The data repository 5 provides a copy of each record within each of the information databases 2,3,4 and therefore mirrors the content of these databases. However, for each record, only data within selected fields is retained within the data repository and therefore records within the data repository contain substantially less data than that provided within the original record upon the respective information databases. As to which fields are copied into the data repository 5, this is determined by the administrator of the system 1 and is dependent upon the type of searching services which are to be provided to a user.

Table 1 shows part of a record within the data repository 5 relating to the Genbank record for the HTR2B gene (AF156159).

TABLE 1

Extracted Term	Genbank Field	Meta-Data Type	Meta-Data Field
HSSTR2B2	LOCUS	definitional/semantic	SYNONYM
DNA	LOCUS	definitional	DOMAIN
21-APR-2000	LOCUS	definitional	ENTRY DATE
HTR2B	DEFINITION	semantic	SYNONYM

Homo sapiens 5-hydroxytryptamine 2B receptor (HTR2B) gene, exon 2.	DEFINITION	definitional	DEFINITION
AF156159	ACCESSION	definitional/semantic	SYNONYM
Homo sapiens	ORGANISM	definitional	SPECIES
HTR2B	FEATURES / mRNA / gene	semantic	SYNONYM
5-hydroxytryptamine 2B receptor	FEATURES / mRNA / product	semantic	SYNONYM
HTR2B	FEATURES / gene / gene	semantic	SYNONYM
HTR2B	FEATURES / CDS / gene	semantic	SYNONYM
5-hydroxytryptamine 2B receptor	FEATURES / CDS / product	semantic	SYNONYM

In addition to the "Extracted term" data and the "Genbank file" data extracted from Genbank and retained in the respective columns, the "Meta-Data Type" and "Meta-Data Field" columns of Table 1 provide additional information defining the type of data which is contained in the respective field. This is described as "meta-data" because data in these fields describes the data obtained from the information databases 2,3,4. Two types of meta-data are used in this example system, these being "definitional" and "semantic".

Definitional meta-data is information that is used to uniquely describe and/or categorise data in terms of its nature, use, value and encumbrances. Semantic meta-data provides alternative terms for data such as synonyms or cross-references. Semantic meta-data is used to infer equality in meaning between data from the information databases 2,3,4. These two types of meta-data are not exclusive and therefore meta-data can be both descriptive and semantic. For example a gene name for a data record may be both definitional and semantic meta-data.

The "Meta-data type" column shows the kind of meta-data to which each extracted field relates and the "Meta-data Field" column defines a corresponding meta-data field for searching purposes. It can be seen in this latter case that a number of the fields from the information databases are assigned to the same meta-data field, namely "SYNONYM".

In this particular record, the term "DNA" from this record is assigned to the "DOMAIN" meta-data field. The use of domains is described in more detail later.

Each record within the repository 5 also has associated meta-data in the form of a "pointer" which identifies the database and record from which the data was obtained. In this case, the Genbank field "ACCESSION" is used to identify the record and separate data (not shown in the Table 1) identifies the Genbank database.

Turning now to the search database 7, this is also arranged as a number of records, each record defining a group of synonymous terms. These terms are obtained from the information databases 2,3,4 and may relate to not only some synonymous terms within the same database but also synonymous terms between different information databases. Each record in search database 7, may also define broader and/or narrower related terms. Table 2 is an example of extracted synonyms from the Genbank record shown in Table 1.

TABLE 2

Identifier	Synonym	Preferred Term
012345678	HSHTR2B2	HTR2B
012345678	HTR2B	HTR2B
012345678	AF156159	HTR2B
012345678	5-hydroxytryptamine 2B receptor	HTR2B

Each synonym is assigned to a particular group identified with a corresponding group identifier which is internal to the system. Additionally, each group of

synonyms has a "preferred" term which typically is the most commonly used or most convenient term for explanatory purposes. However, whether the actual preferred term is used as the inputted search term, does not affect the search scope.

Table 3 shows part of a typical record upon the search database 7, containing synonyms extracted from the three information databases 2,3,4, for example Genbank, Swissprot and OMIM. Any degeneracy between the terms extracted from these information databases is removed.

TABLE 3

Identifier	Synonym	Preferred Term
012345678	HSSTR2B2	HTR2B
	HTR2B	
	AF156159	
	5-hydroxytryptamine 2B receptor	
	5-HT2B	
	5HT2B	
	Serotonin 2B receptor	

Referring back to Table 1, it can be seen that each of the extracted terms which were assigned to the "SYNONYM" meta-data field, are also found within the same record in Table 3 (as the first four entries in the "Synonym" column). The use of the meta-data field increases the searching speed when a search for synonymous terms is being performed within the records of the data repository 5, as searching in other fields is not needed. It should be remembered that the data repository 5 contains records from a number of different information databases 2,3,4 and therefore assigning meta-data fields produces this speed increase.

Further information is also present within the records of the search database 7, for example, in the case of each

synonym, an identifier is provided to identify the database(s) and in some cases the field(s) in which the term is present. Each of the search database records also contains a brief textual description of the subject to which the synonyms relate, such as "Gene that encodes the 5-hydroxypytryptamine 2B receptor".

Figure 2 shows a flow diagram of a suitable method for use in the database searching system 1. At step 100 in Figure 2, a user of the system inputs a search term using the input means 8. At step 101, other information is also provided, for example in that the user selects a number of information databases upon which to search for the search term and possibly, a limitation to one or more field types in which to search for this term.

In the present example, each of the databases 2,3,4 is selected and the user chooses all field types for searching. At step 102, the query system 6 analyses the input search term and then searches upon the search database 7 for any records containing the input search terms. This returns one or more "hits", that is records containing the search term as one of the synonymous terms. These records are then retrieved at step 103 and presented to the user.

In some cases, the search term will be present in more than one of the records upon the search database 7. In this case, the user can view the textual description attached to the record in order to select the type of information required.

Having reviewed the record description, at step 104, the user selects the particular record to which the intended search relates. At step 105, the synonymous terms held in the selected record of the search database 7 are then searched in the required fields of the records held in the data repository 5. Only those fields corresponding to the particular information databases selected by the user are searched and the results are then returned to the user at step 106.

At step 107 a context filtering step is performed which analyses the records in order to discard records which are not related to the desired search. For example, in a case where more than one search database record is initially returned, there will exist at least one synonym (the search term) which is used upon the information databases in two different contexts. It is desirable to prevent the display of records which do not relate to the context of interest. This is achieved by context filtering.

The method chosen for this filtering depends upon the way in which the information databases are structured. In the case of more unstructured databases, for example databases of the full text of scientific publications, an appropriate filtering technique is to search for other words relating to the context of interest within the records (such as searching for the other synonyms). If none are found then the word in question can be assigned a low likelihood of relevance. If desired, this can be expressed mathematically for filtering and/or presented to the user.

For more structured information databases such as the biomedical science databases used in the present example, context filtering can be performed using the "domain" field as mentioned earlier. Upon construction of the data repository 5, the records are assigned to specific "domains" which represent broad topic classes such as DNA, disease, and so on. In this case, synonyms in a single search database record relate to information database records within a single domain. The search for records within the repository 5 can therefore be limited to records having the domain common to the synonyms within the group of interest. A combination of these and other techniques can therefore be performed to effect context filtering. This filtering may be performed following retrieval of all of the records as in the present case, or it may be performed "on-the-fly".



The retrieved and context filtered records from the data repository 5 are presented to the user at step 108. On selection of a particular record of interest by the user, at step 109 the pointer within the particular repository record of interest is accessed to discover the identity of the corresponding record upon one of the information databases 2,3,4. This full record is then retrieved from the specific information database and displayed to the user at step 110.

10 The above method can therefore advantageously be used to search for related information in databases which use different but synonymous terms to describe similar information. The selection of the extent to which terms are synonymous is at the discretion of the system administrator. Broader searches can be performed by using  
15 related rather than synonymous terms.

Although the amount of information searched is significantly in excess of that searched using a single database, the speed and efficiency of the searching is  
20 significantly increased by the use of the data repository in which selected record extracts are used for searching purposes.

In the present system, the user is not limited to searching using the technique described above as the method  
25 can be integrated with other conventional database searching tools which access the repository or the information databases directly.

CLAIMS

1. A method of searching a plurality of information  
databases for records related to an input search term,  
5 comprising:-

selecting a group of related search terms containing  
the input search term, from a search database of terms  
arranged in predefined groups according to their  
relationship with one another, wherein each term is present  
10 within one or more of the information databases; and,

searching for terms from the selected group within a  
data repository comprising selected data previously  
extracted from the records of each information database, to  
identify the corresponding records within the information  
15 databases which contain the terms within the selected  
group.

2. A method according to claim 1, wherein the data  
repository is arranged as a number of records, each record  
corresponding to a record present within one of the  
20 information databases.

3. A method according to claim 2, wherein each record in  
the repository comprises a pointer identifying the record  
in the information database to which it relates.

4. A method according to any of the preceding claims,  
25 wherein the amount of selected data in the repository is  
less than that contained in the information databases.

5. A method according to any of the preceding claims,  
wherein the data in the repository comprises definitional  
data.

30 6. A method according to claim 5, wherein the definitional  
data describe data in terms of its nature, use or value.

7. A method according to any of the preceding claims,  
wherein the data in the repository comprises semantic data.

8. A method according to claim 7, wherein the semantic  
35 data describes alternative terms for the data in the  
information database.

9. A method according to claim 8, wherein the semantic data describe synonymous terms in the information databases.

10. A method according to any of the preceding claims, wherein each term in each predefined group within the search database has associated metadata indicating the one or more information databases within which the term is contained.

11. A method according to claim 10, wherein the corresponding metadata indicates the one or more fields of the information database(s) within which it is contained.

12. A method according to any of the preceding claims wherein a number of records within the data repository are assigned to a domain.

13. A method according to any of the preceding claims, wherein the terms in the predefined groups within the search database are synonymous terms.

14. A method according to any of the preceding claims, wherein each group has an associated group identifier.

15. A method according to claim 13 or claim 14, wherein each group has associated descriptive data for describing the group.

16. A method according to any of the preceding claims, further comprising determining the context of any repository records located.

17. A method according to claim 16 and when dependent upon claim 12, wherein the context is determined by limiting the search to repository records having a common domain.

18. A method according to claim 16 or claim 17, wherein the context is determined by searching for the presence of one or more of the other terms within the group, in the same record of the repository.

19. A computer program comprising computer program code means adapted to perform the method according to any of the preceding claims.

20. A computer program according to claim 19, embodied upon a computer readable medium.

21. A database searching system for searching a plurality of information databases for records related to an inputted search term, the system comprising:-

5 a search database comprising related search terms arranged into predefined groups according to their relationship to one another, wherein each term is present within one or more of the information databases;

selection means, for selecting a group containing the inputted search term from the search database;

10 a data repository comprising selected data previously extracted from the records of each information database; and,

searching means for searching the repository for terms from the selected group to identify the corresponding records within the information databases which contain the terms within the selected group.

22. A system according to claim 21, wherein further comprising an input means for applying the inputted search term to the selection means.

20 23. A system according to claim 22, wherein the input means comprises a communication network such that the inputted search term is received from a remote location.

24. A system according to any of claims claim 21 to 23, further comprising a plurality of information databases from which data is extracted for storage within the data repository.

25 25. A system according to any of claims 21 to 24, wherein the data repository, is stored upon a separate computer system with respect to the information databases.

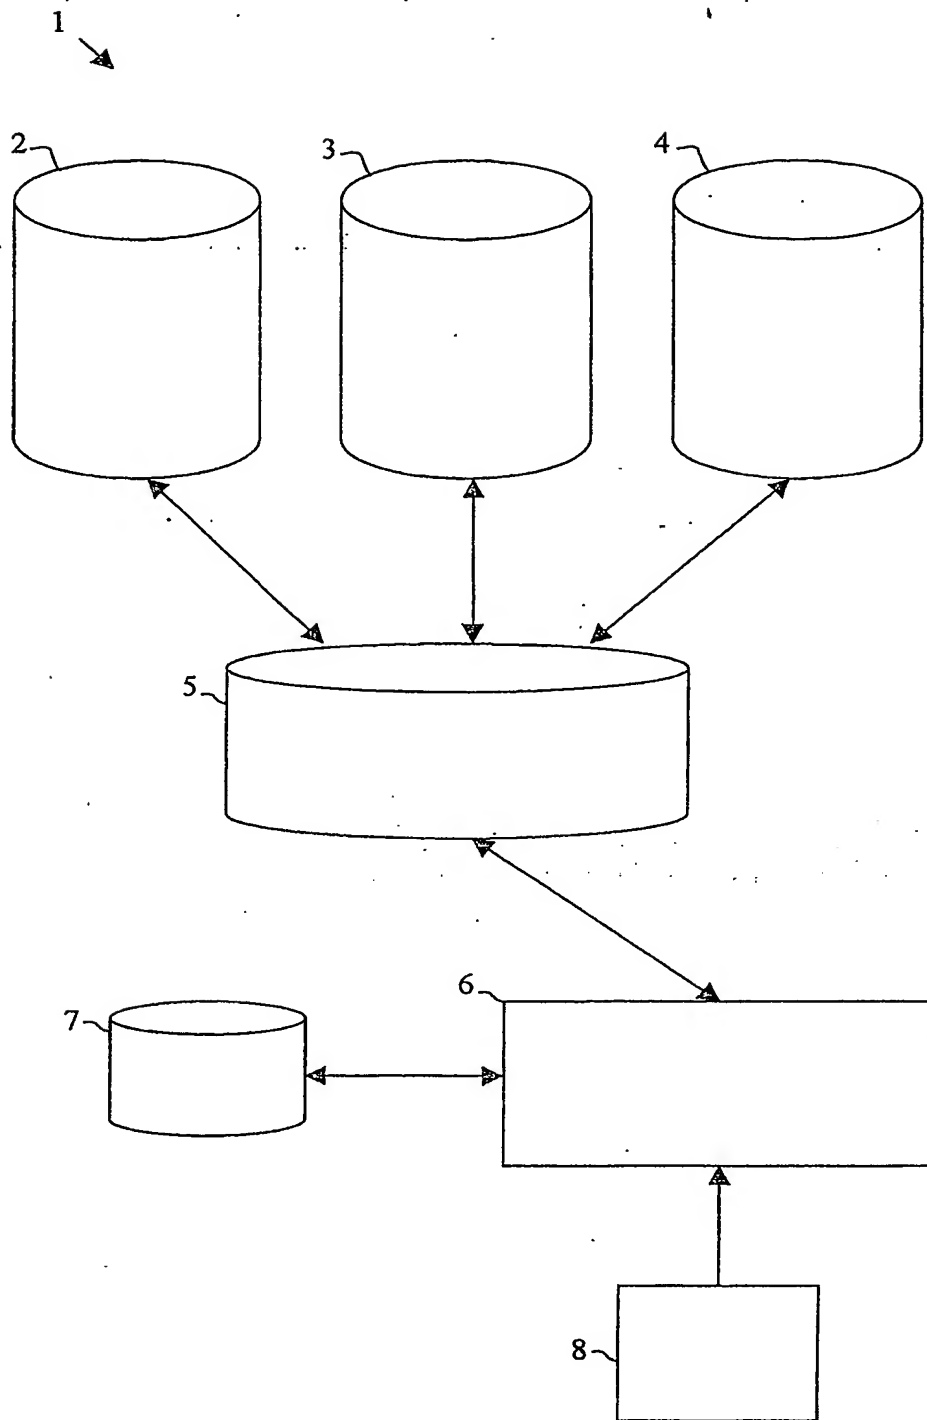


Fig. 1

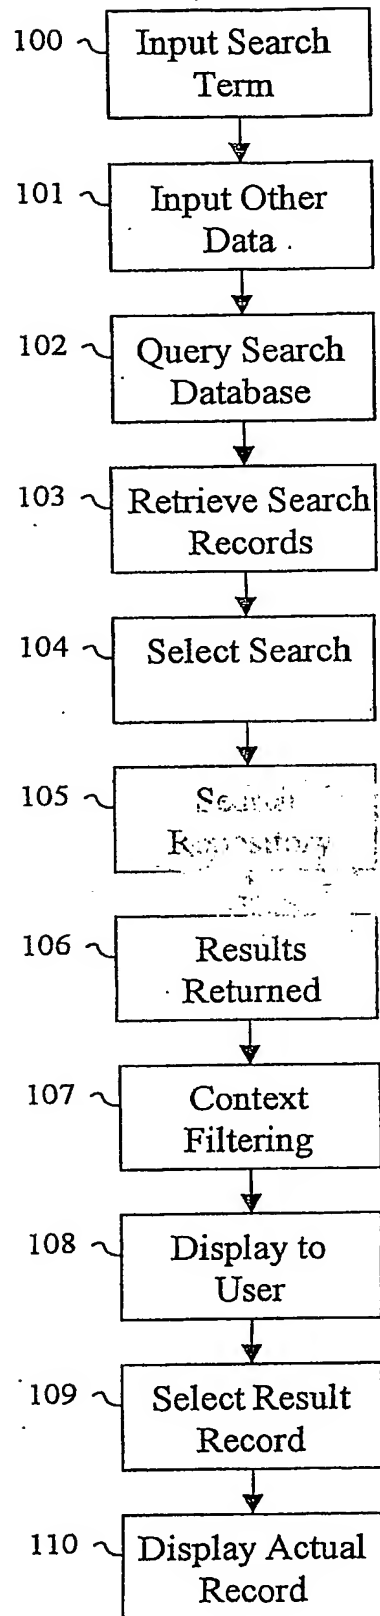


Fig. 2

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**